Downloading Procedure

Determine current version of software on the machine. If it is greater than 10 versions behind current version, please see **Updating Bin File Procedure.**

Download software from the Smart ag systems web site www.smartagsys.com

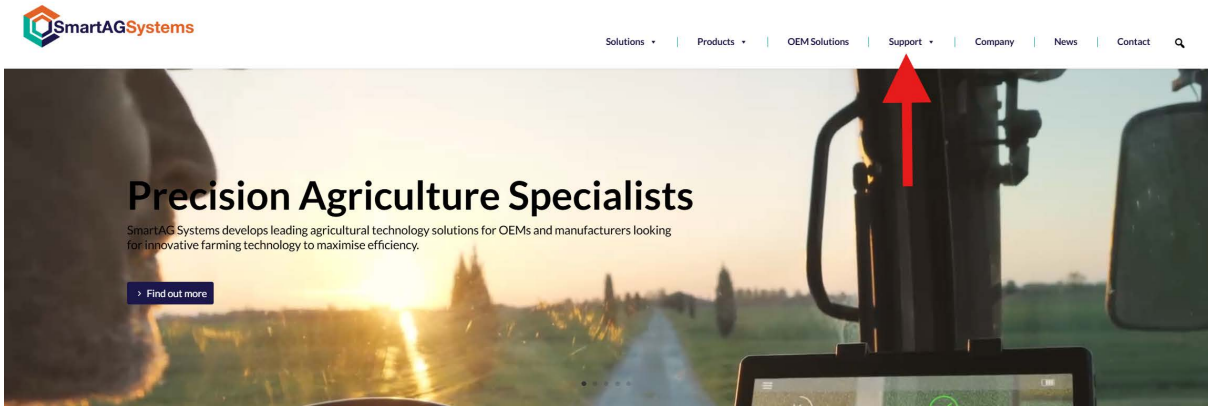

From the main navigation menu, hover over **Support** as indicated by the red arrow, then select **7000 Support** to access the latest software updates for the 7000 range.

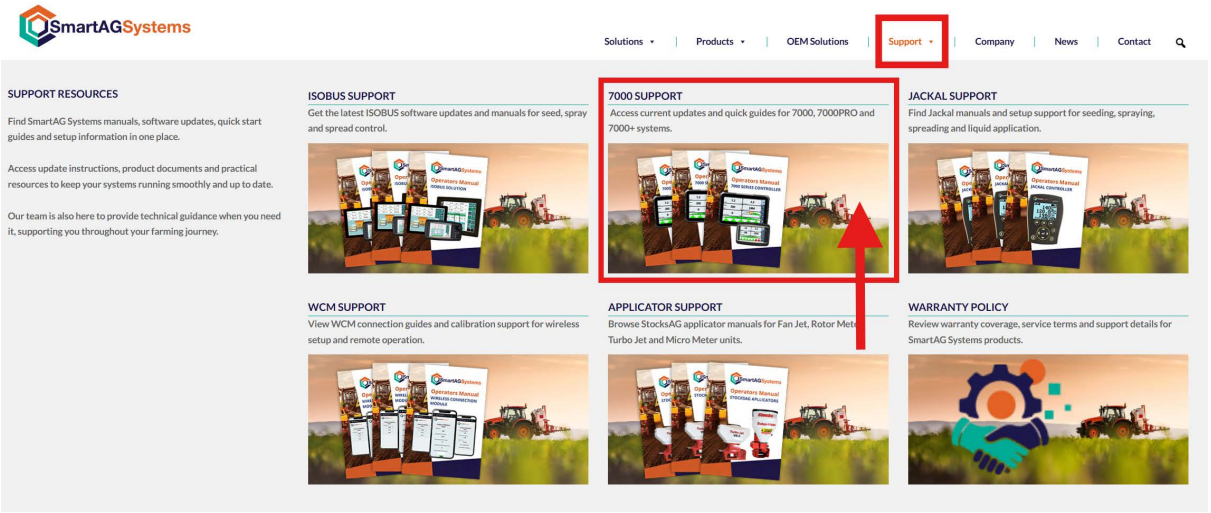

Select **7000 Series Software Updates** by clicking the computer icon.

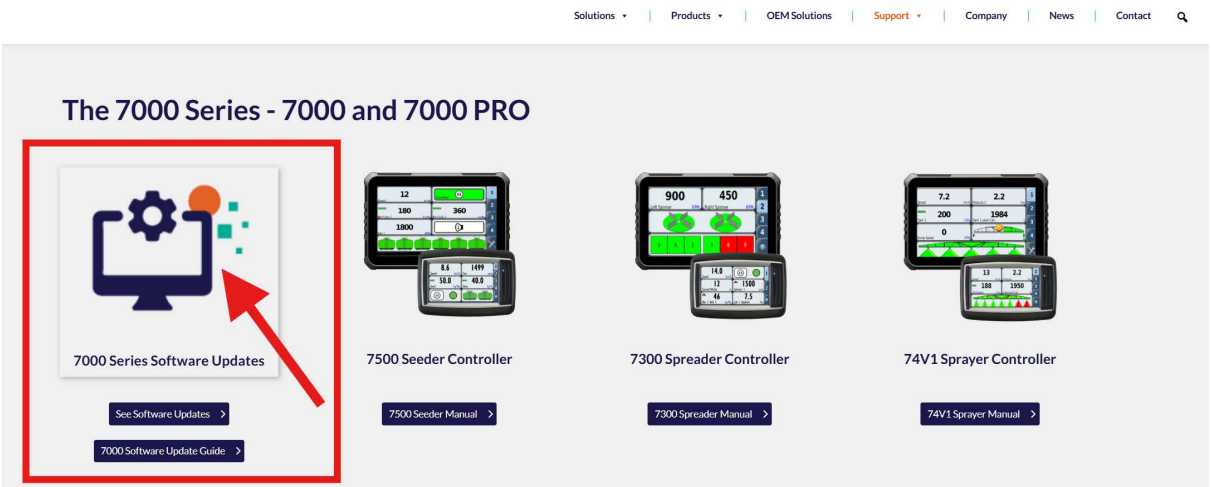

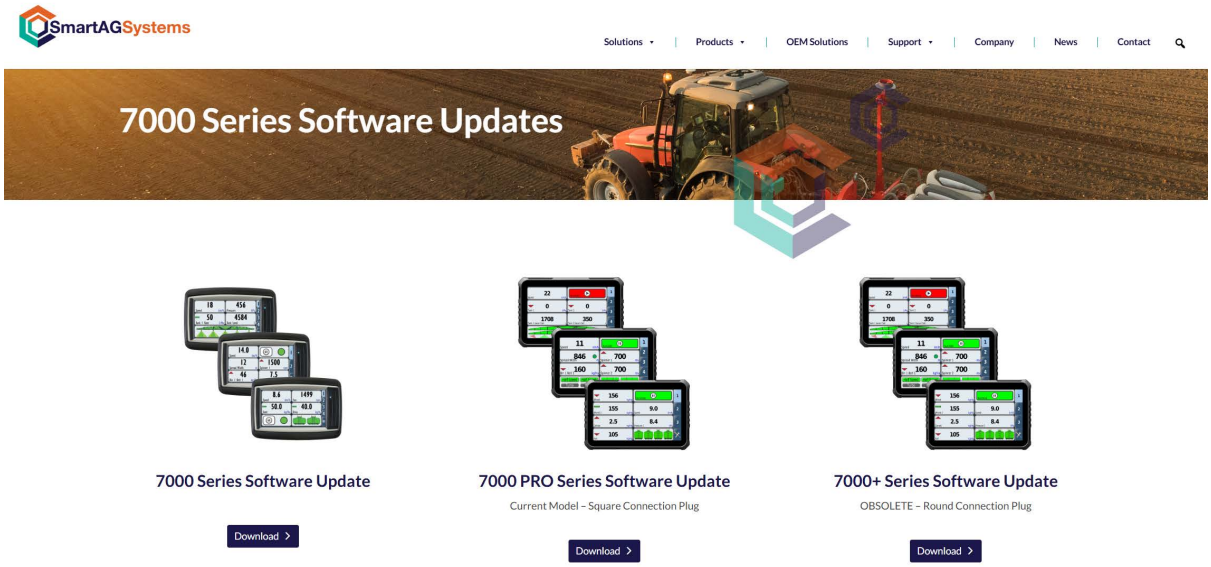

Select the current version and this will automatically download to your downloads folder in file server on your computer **Windows,** not sure what happen on an Apple PC.

Select the software for the display type that you have, from the three options:

1 - 7000 Series Software Update

For the 7000 monitor with the smaller 4.3-inch display.

2 - 7000 PRO Series Software Update

For the current 7000 PRO model with a 7-inch touchscreen, flat front and square connection plug.

3 - 7000+ Series Software Update

For the 7000+ model with a 7-inch display and round connection plug. Please note that this model is now obsolete and has been replaced by the 7000 PRO, which features a square connection plug. Software updates are still available for customers using the 7000+ model.

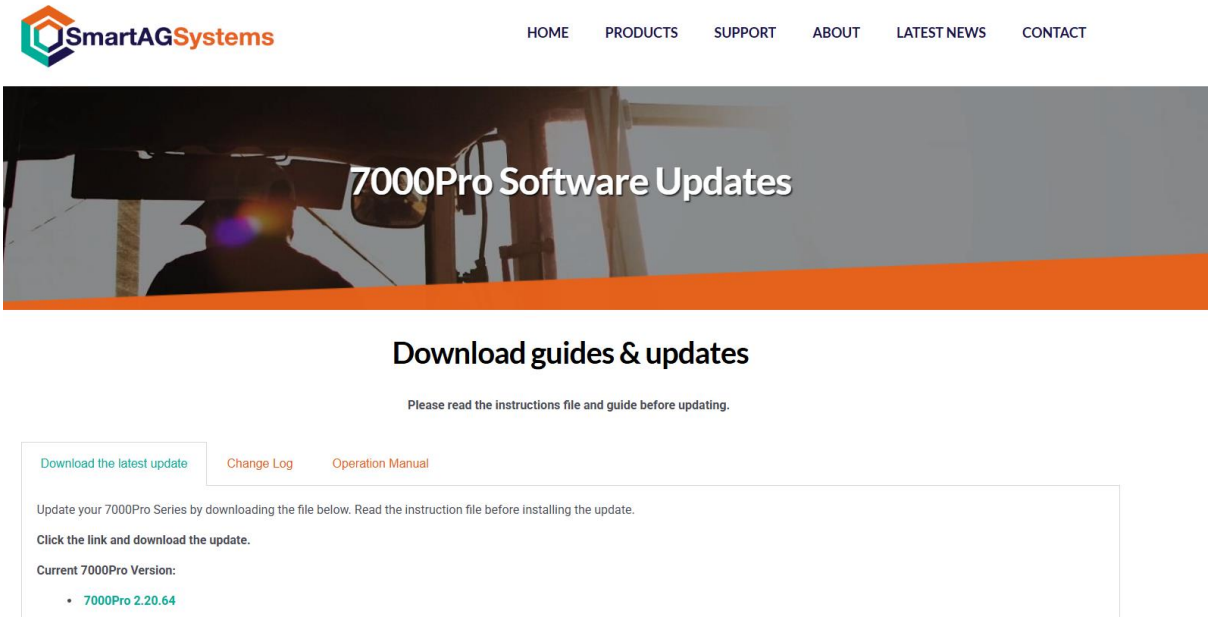

Select the current version and this will automatically download to your downloads folder in file server on your computer **Windows,** not sure what happen on an Apple PC.

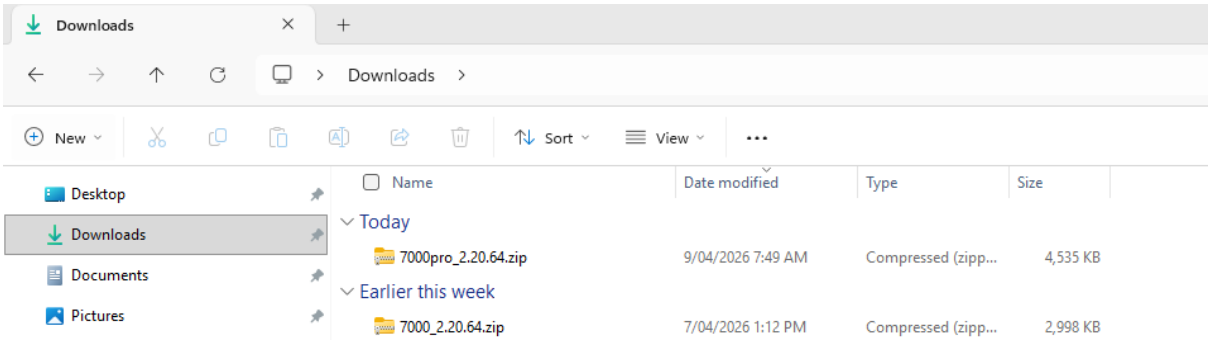

Open a new folder or move this file to a folder that you can easily remember where it is.

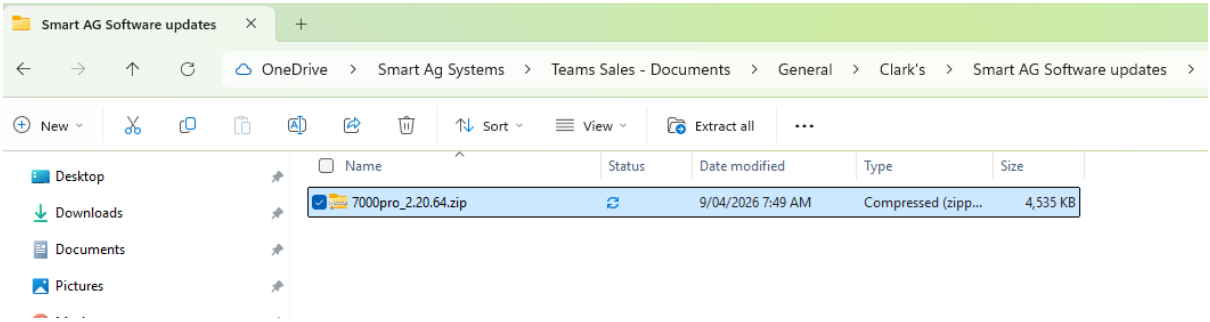

Please note that this is in a ZIP file format and will need extracting.

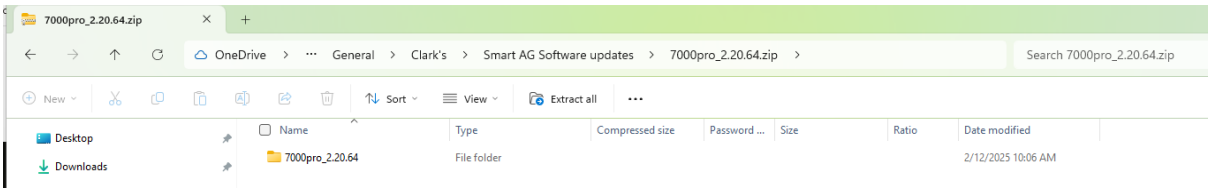

Double mouse click on the zip file to get the unzipped file, as shown above

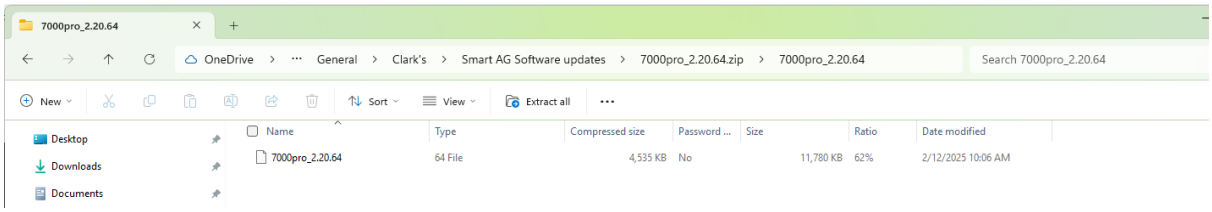

Double mouse click of the manila folder to get the file ready with a white page next to it, as shown above.

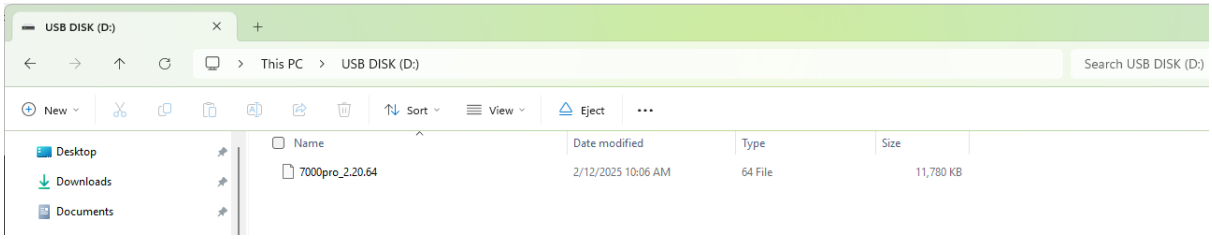

Copy file and paste onto the USB, as shown above, Now you are ready to use the USB in the 7000 display. Plug the USB into the display cable or side of the display.

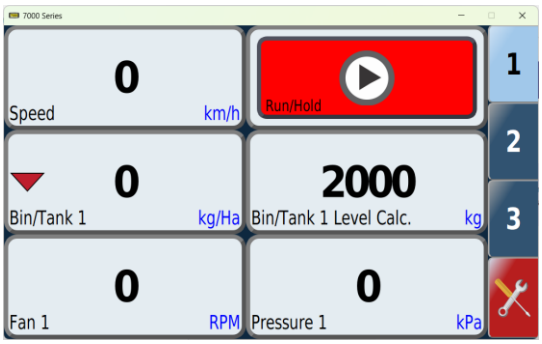

From the front screen, press the **Spanner**,

Now select the **Toolbox**.

Select **System**

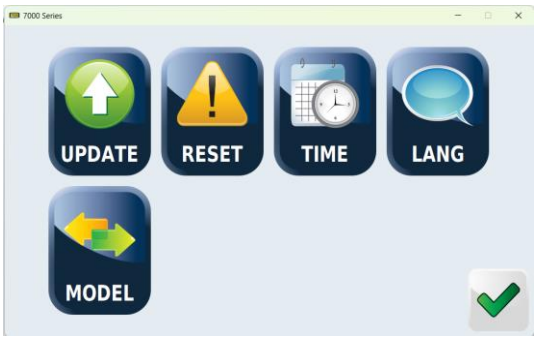

Select **Update**

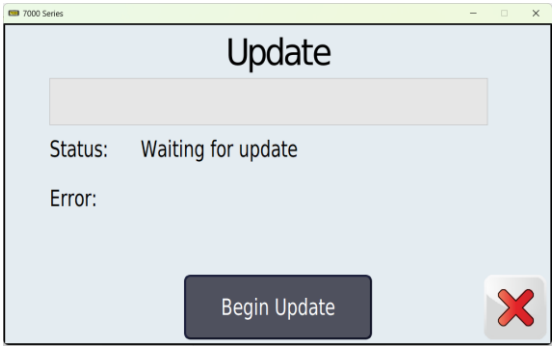

Press **Begin Update**

If you have any issues with the update process, then please check the USB is formatted correctly and then reload the software as per instructions above. If it still does not work, please try another USB stick.